

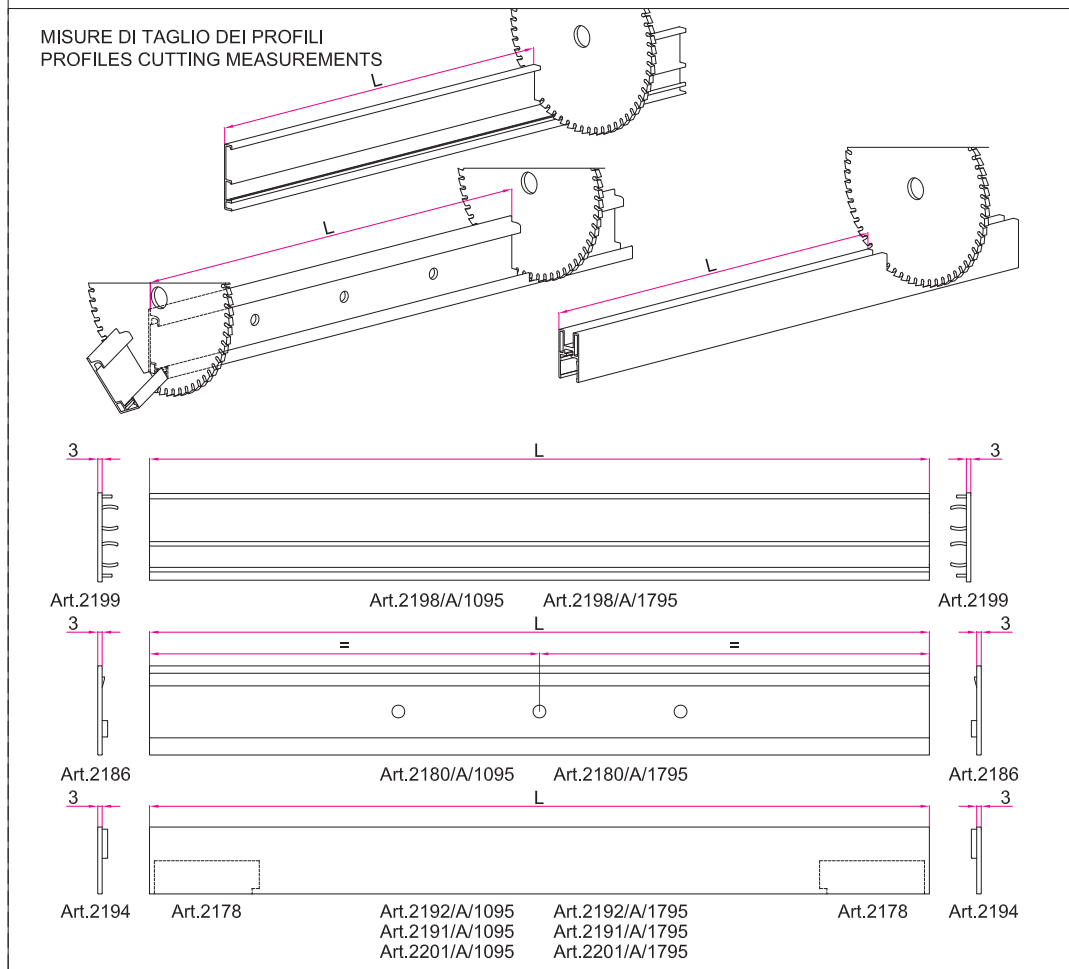




2

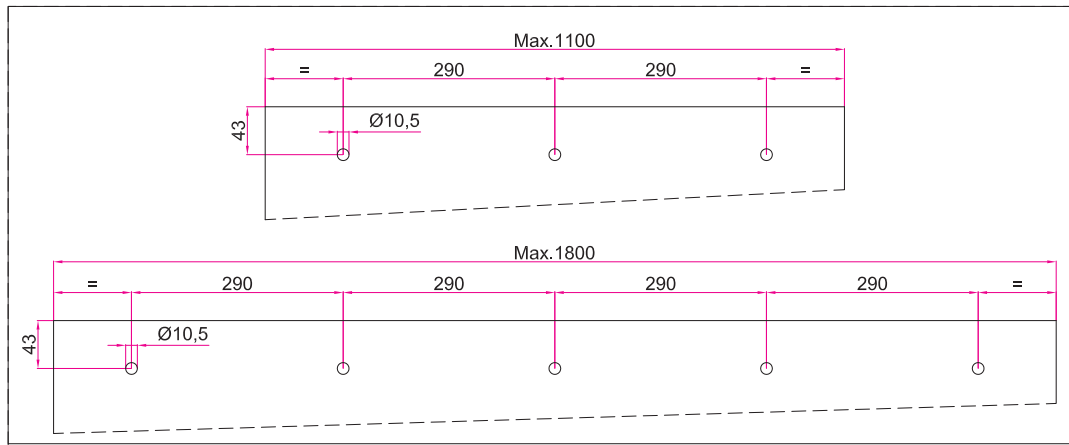



3

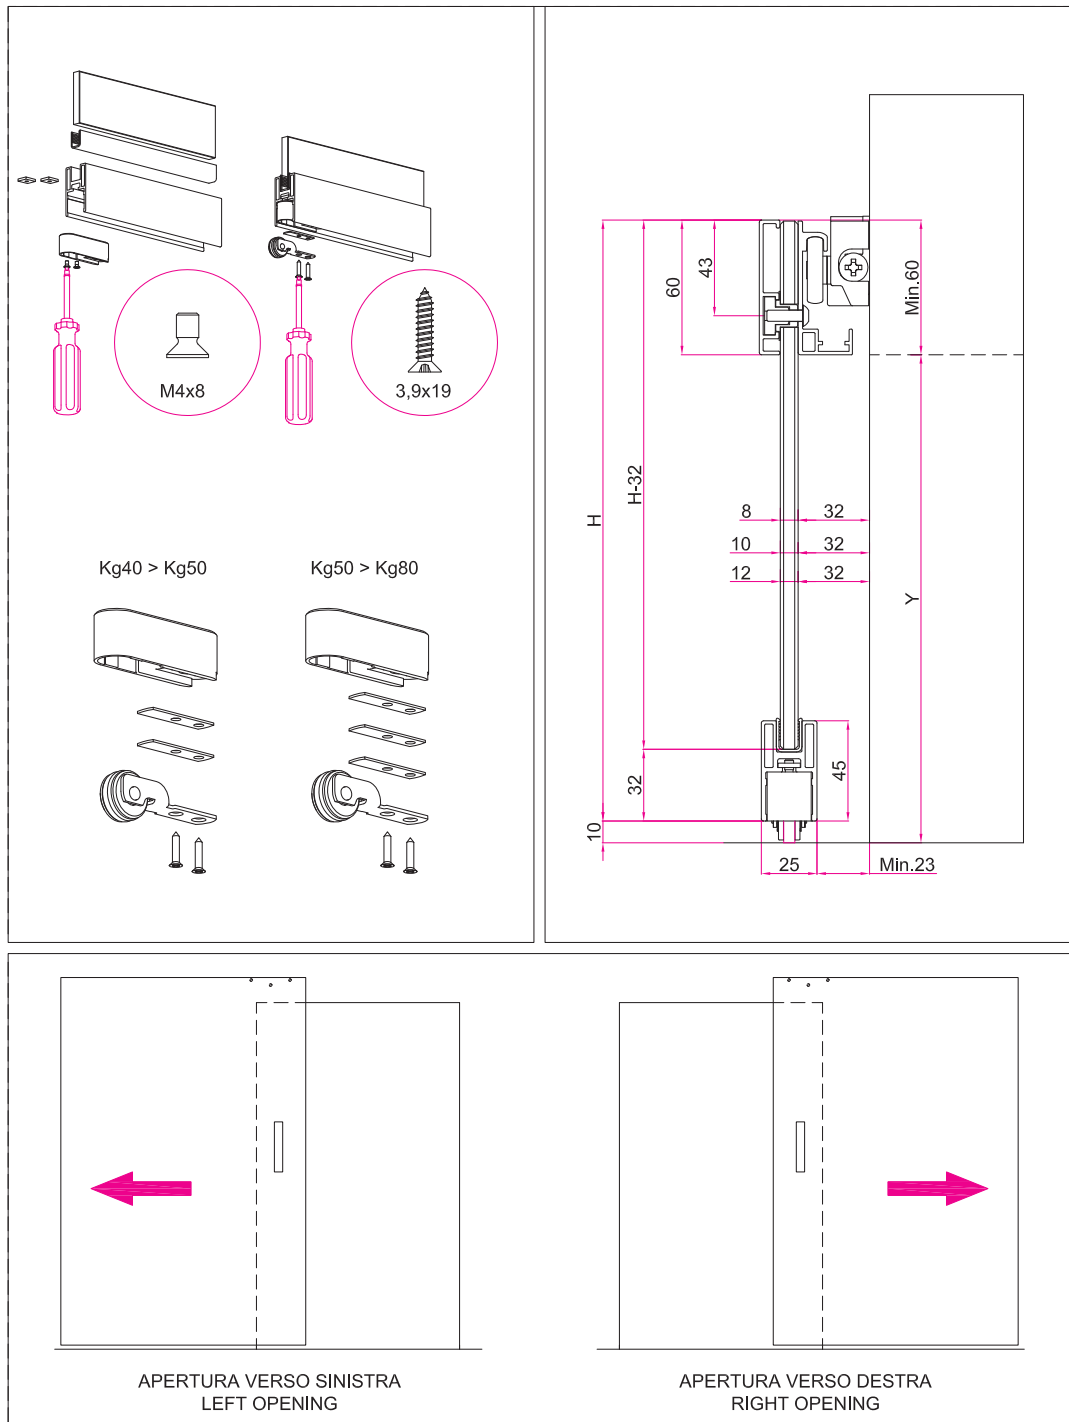

4

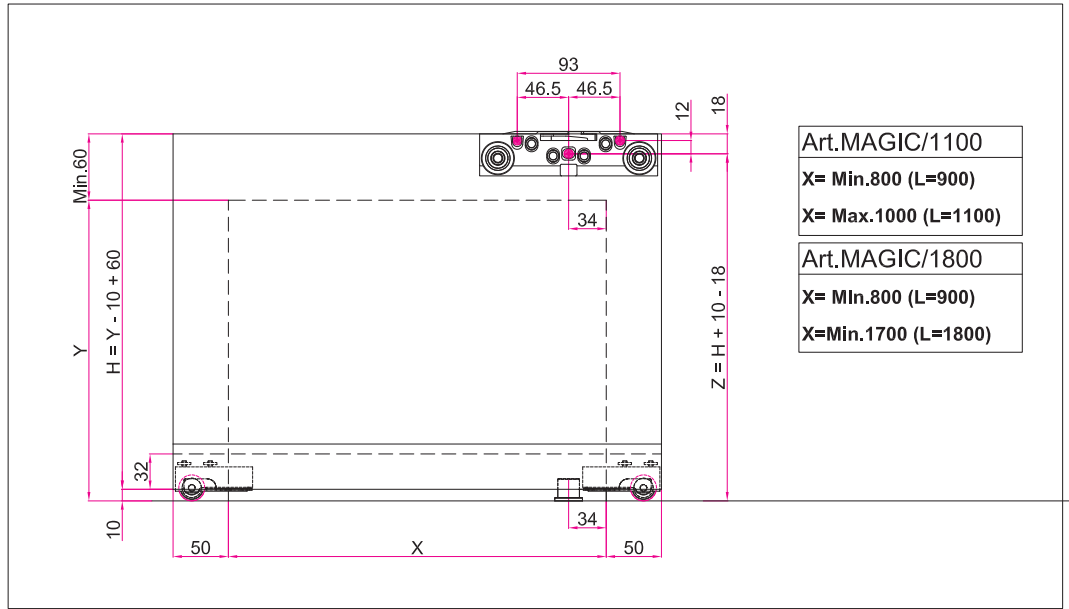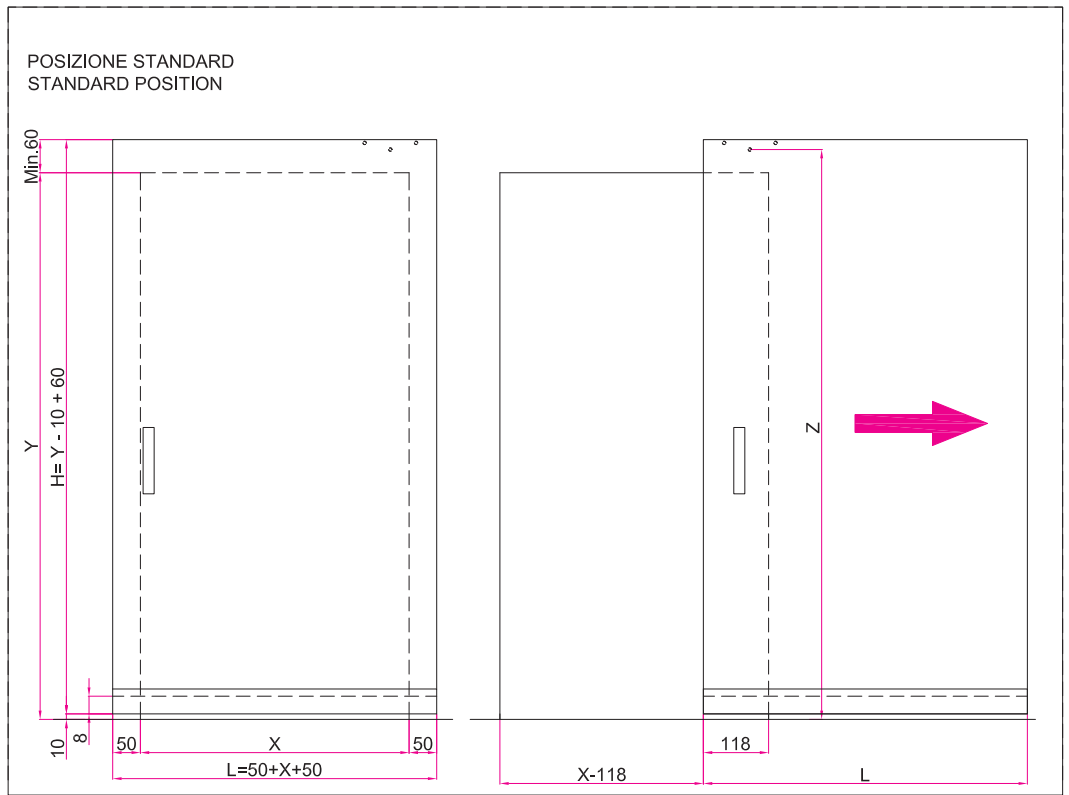

5

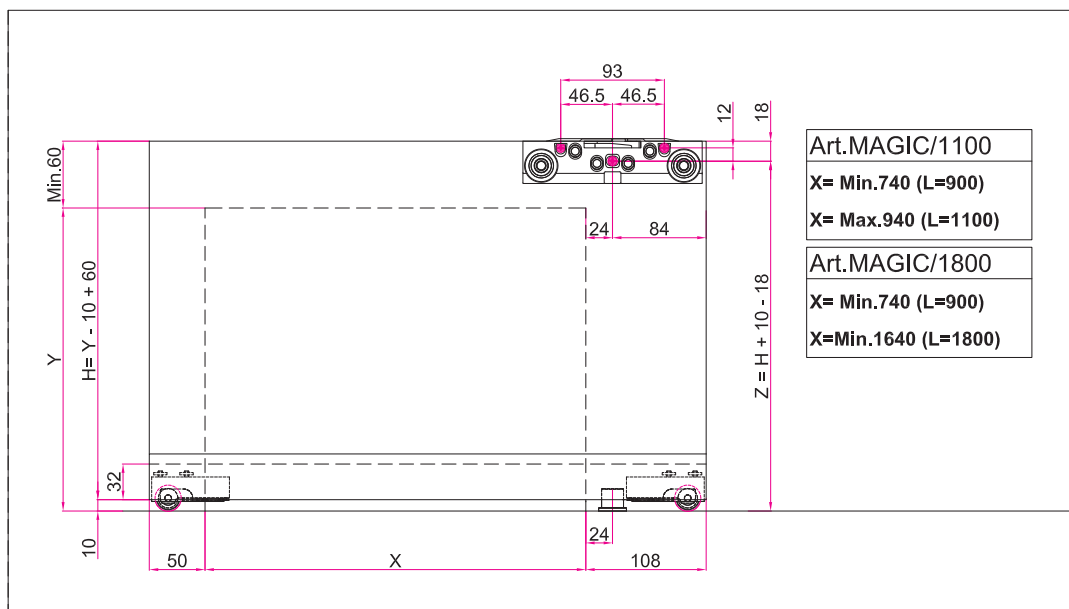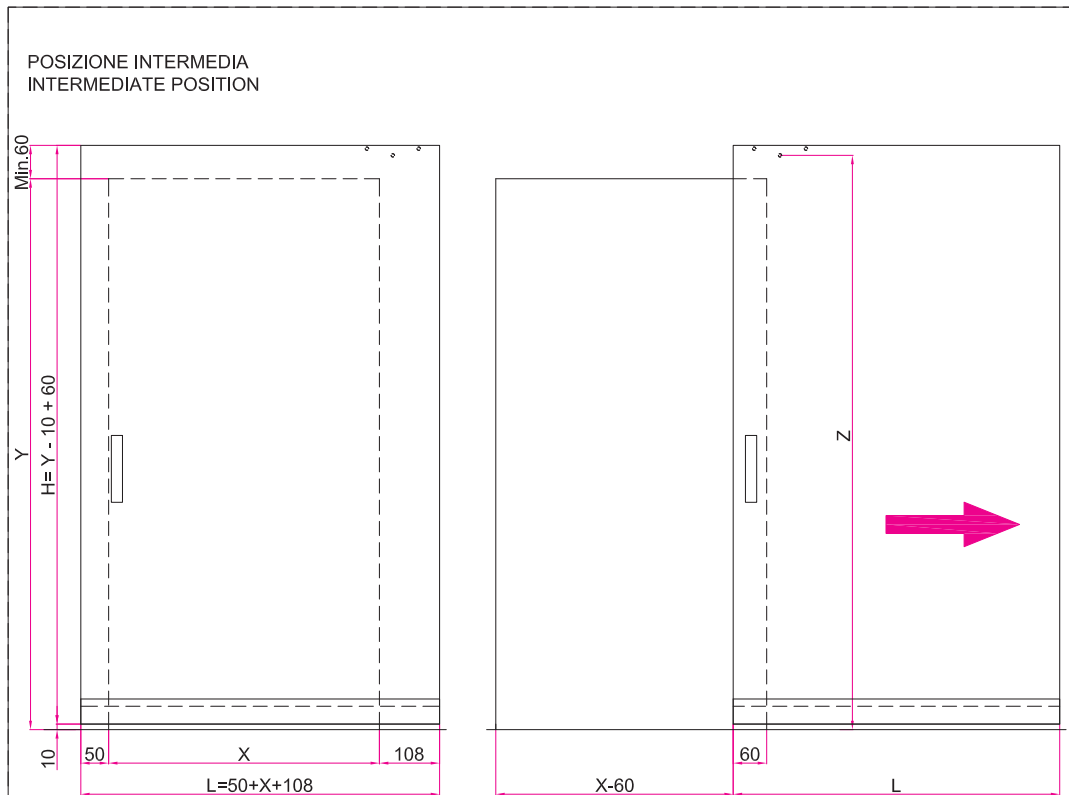

POSIZIONE APERTURA TOTALE
TOTAL OPENING POSITION

Min. 60

Y

$H = Y - 10 + 60$

10

50

X

168


$L = 50 + X + 168$

Z

X

0

L

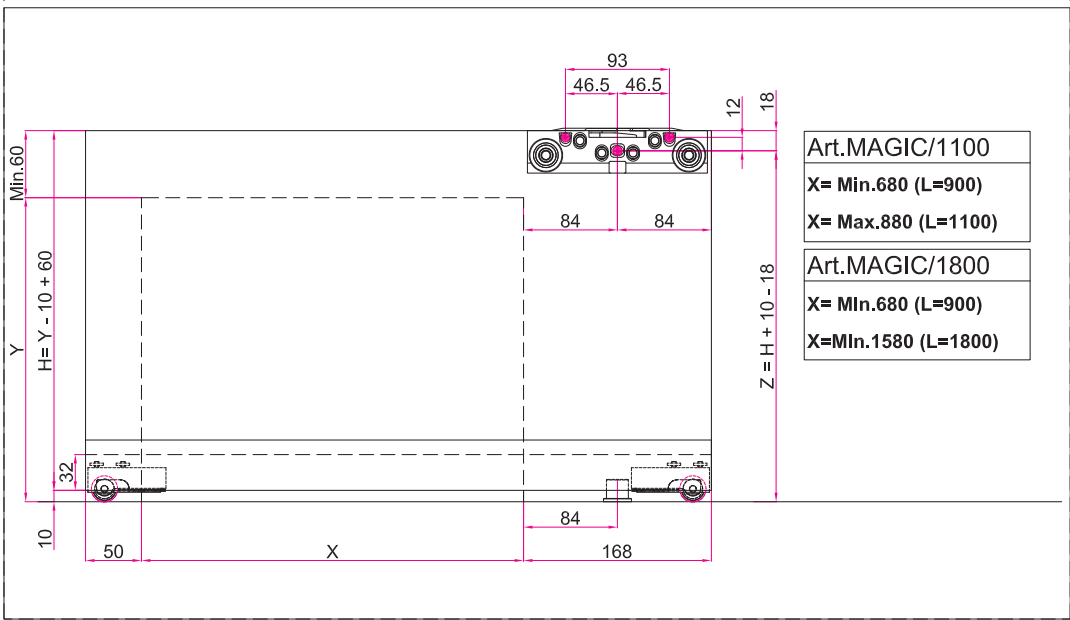

**FISSAGGIO DEL PROFILO SUPERIORE CON BORCHIE
UPPER TRACK FIXING WHIT CAPS**

The diagram illustrates the installation of the upper track. On the left, a side view shows the track being secured to a wall with a screw. A circular inset provides a detailed view of the screw, which is labeled 'M5x16'. On the right, a top-down view of the track shows four screws being used for fixation, with the central one highlighted in pink.

**FISSAGGIO DEL PROFILO SUPERIORE CON FASCIA
UPPER TRACK FIXING WHIT**

The diagram illustrates the installation of the upper track. On the left, a track is shown being aligned with the wall. On the right, the track is shown being secured with a screw and a washer, indicated by a red circle and arrow.

POSIZIONAMENTO DEI DISTANZIALI E
DEI FERMI AMMORTIZZATI



SPACER AND SOFT CLOSING
POSITIONING

The diagram illustrates the installation of spacers and soft closing components. On the left, a side view shows a window frame with a spacer being positioned into a channel, indicated by a pink arrow. On the right, a cross-sectional view shows the internal components of the frame, including the spacer and the soft closing mechanism, with a pink arrow indicating the direction of movement.

FISCHER UX6
4,5x40

FISCHER SX5
4x30

FISSAGGIO DEL PROFILO INFERIORE
LOWER TRACK FIXING

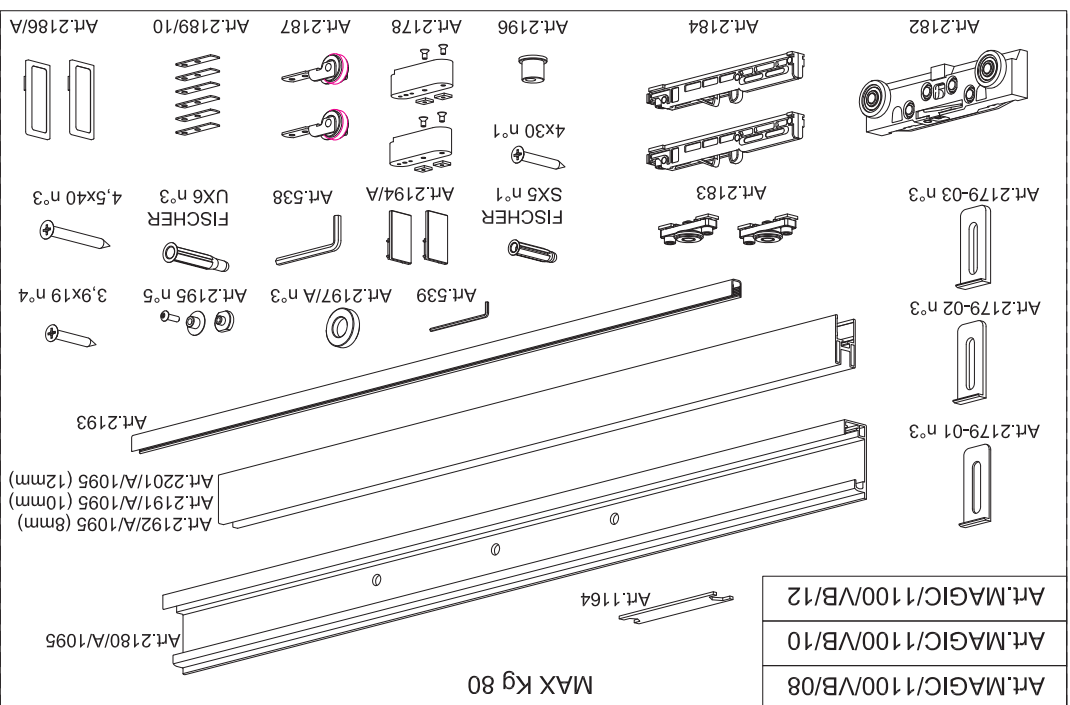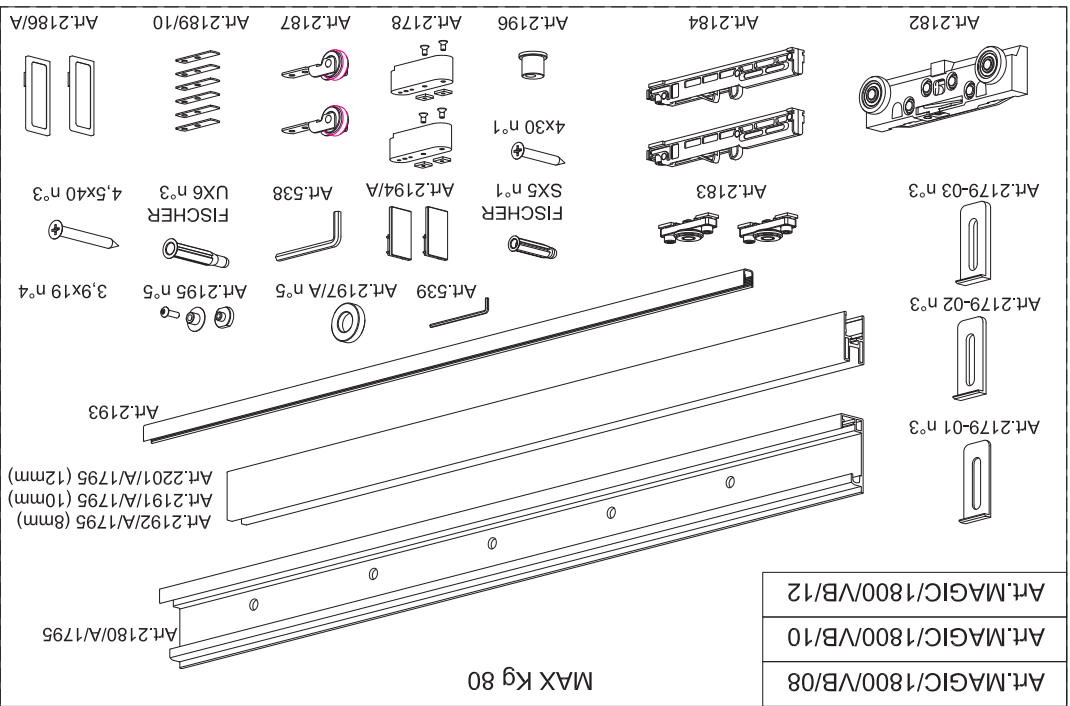

UTILIZZARE GLI SPESSORI PER COMPENSARE GLI
 AVALLAMENTI DELLA PARETE
 USE OF SHIMS TO COMPENSATE FOR WALL
 DEPRESSIONS

Diagram illustrating the internal components of the door handle assembly:

- FERMO** (Lock)
- AMMORTIZZATO** (Damped)
- SOFT CLOSING**
- DISTANZIALE** (Spacer)
- SPACER**
- TAPPI LATERALI** (Side Caps)
- LATERAL CAPS**

CARICAMENTO AUTOMATICO DEL FERMO AMMORTIZZATO
SELF ACTIVATING SOFT CLOSING SYSTEM

ATTIVAZIONE ANTISGANCIAMENTO
ANTI-UNHOOKING ACTIVATION

REGOLAZIONE CARRELLO
SLIDING ADJUSTMENT

Diagram illustrating the adjustment of the door positioning. The left side shows the door in a closed position with dimensions 25, 32, and 45. The right side shows the door in an open position with a red arrow indicating the direction of movement.